

Available in
heat sealed panels
(See Page 46)


Standard Put-Up: 100 yards

BANNER FABRICS

10 OZ. ERC

An enamel receptive coating is the key to this item. It is specially designed for enamel base paints, which are ideal for hand painted applications. Ideal for indoor or short term outdoor usage. Will accept vinyl letters. BV-ERC-10.

- 10 oz. per square yard.
- Enamel receptive.
- Smooth face side.
- Banner vinyl.
- Available in 36", 54" and 72" widths.
- Colors available: White, Red, Blue, Black & Yellow.




WHITE
BV-ERC 10-00-(width)



RED
BV-ERC 10-01-(width)



BLUE
BV-ERC 10-02-(width)



BLACK
BV-ERC 10-04-(width)




YELLOW
BV-ERC 10-05-(width)

10 OZ. MATTE

Standard Put-Up: 100 yards

This product has set a new industry standard for great construction and quality. An extremely smooth product, ideal for almost any indoor or short term outdoor application. BV-MATTE-10.

- 10 oz. per square yard.
- Matte finish.
- Smooth face side.
- Vinyl banner fabric.
- Available in 36", 54" and 72" widths.
- Colors available: White, Red, Blue, Black & Yellow.



WHITE
BV-MATTE 10-00-(width)




RED
BV-MATTE 10-01-(width)



BLUE
BV-MATTE 10-02-(width)



BLACK
BV-MATTE 10-04-(width)




YELLOW
BV-MATTE 10-05-(width)

13 OZ. AND 16 OZ. ULTRA SMOOTH OPAQUE

Standard Put-Up: 100 yards

If smooth is what you are looking for, you will find it with our Ultra Smooth Opaque product. Both sides are equally as smooth, with an opaque barrier to block any images from showing through to the opposite side. For indoor use and some outdoor exposure with significant support against a wall or building. BV-ULTRA-13 oz. and 16 oz..

- Great for two-sided lettering!
- Ultra smooth finish both sides.
- Available in 36", 54", and 72" widths.



WHITE
BV-ULTRA 16-00-(width)
BV-ULTRA 13-00-(width)*
*13 oz white only




RED
BV-ULTRA 16-01-(width)



BLUE
BV-ULTRA 16-02-(width)



BLACK
BV-ULTRA 16-04-(width)



YELLOW
BV-ULTRA 16-05-(width)

BANGUARD®

100% SOLUTION-DYED ACRYLIC 30" WIDE BANNER FABRIC


This banner fabric is precut to a 30" width. It is ultrasonically sealed to prevent fraying. No wasted fabric, no wasted effort. Banguard® is a solution-dyed acrylic fabric, woven to strict quality standards, and is available in 8 popular colors. It is heat and dimensionally stable and lies flat for easy printing. Banguard® offers a 5-year limited warranty.

TECHNICAL DATA:


FABRIC:	Woven Acrylic	FIBER:	100% solution-dyed acrylic
WEIGHT:	Approx. 9.25 oz. per sq. yard	BOLT:	Approximately 60 yards
WATER COLUMN:	Exclusive fluorocarbon finish	WIDTH:	30"
TEAR STRENGTH:	350 Newton	EDGES:	Ultrasonic Cut
TENSIL STRENGTH:	Warp 750 Newton Fill 360 Newton	FINISH:	Exclusive fluorocarbon finish



BLUE
B-BG-SL004

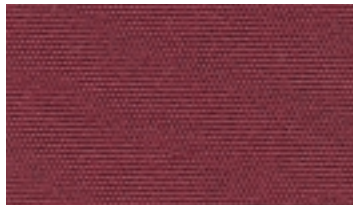

BURGUNDY
B-BG-SL005

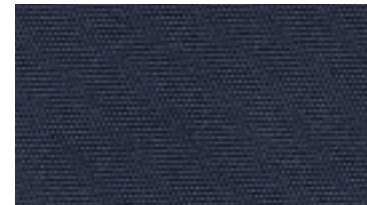

CAPTAIN NAVY
B-BG-SL006




FOREST GREEN
B-BG-SL008



RED
B-BG-SL013



TEAL
B-BG-SL015

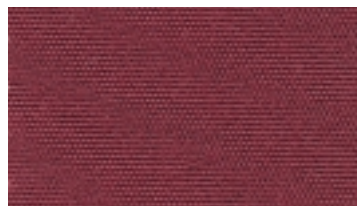

PURPLE
B-BG-SL019



SEA GRASS GREEN
B-BG-SL021

Standard Put-Up: 60 yards

Limited Warranty

- Banguard™ warranty covers the fabric becoming unserviceable because of loss of color from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemicals. It does not cover labor and installation supplied by the dealer.
- The warranty coverage runs for five years from the date of original purchase and is only valid if a sample of the fabric and a copy of the bill for the item purchased is submitted.
- The warranty, if applicable, is limited to the replacement of fabric free of charge.
- This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Available in
heat sealed panels
(See Page 46)

BANNER FABRICS

BRITE LITE® BACKLIT FABRIC

An economical backlit fabric that is resistant to mold, mildew and wicking. It has good ultraviolet protection, a gloss finish and is California Fire Marshall approved with good tensile and tear strength.

- 13 oz. per square yard.
- Gloss finish.
- 61" wide backlit material.
- Colors available: Brite Red, White, Royal Blue, Yellow, Turquoise, Burgundy, Grass Green, Forest Green.

TECHNICAL DATA:

CFSM, UV, Mold, Mildew & Wick Resistant

WEIGHT: 13 oz./square yard, +/-5%

WIDTH: 61"


TENSILE: W 210 lbs/in., +/-5% F 195 lbs/in., +/-5%

TEAR: W 45 lbs/in., +/-5% F 45 lbs/in., +/-5%

EMBOSSING: Gloss



Brite Red
BV-BL-00



White
BV-BL-01



Royal Blue
BV-BL-02



Forest Green
BV-BL-03



Yellow
BV-BL-05



Burgundy
BV-BL-06



Turquoise
BV-BL-08



Grass Green
BV-BL-09

For pressure sensitive films on flexible substrates we recommend the following for the best results:

- Use of high performance cast pressure sensitive films.
- Use of pressure sensitive film that uses a permanent solvent based adhesive system. We do not recommend the use of repositionable films.
- It is important to clean substrate with isopropyl alcohol prior to applying graphics.
- Test a small area to insure that your choice of pressure sensitive film and substrate offers the adhesion you desire.